




# PRODUCT DATA

## #1 DRY

### UNGROUND SILICA

PLANT: MILL CREEK, OKLAHOMA

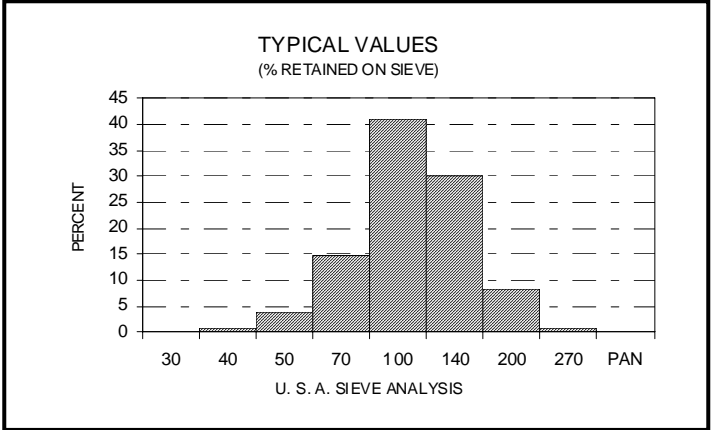

USA STD SIEVE SIZE		TYPICAL VALUES		
		% RETAINED		% PASSING
MESH	MILLIMETERS	INDIVIDUAL	CUMULATIVE	CUMULATIVE
30	0.600	0.0	0.0	100.0
40	0.425	0.8	0.8	99.2
50	0.300	4.0	4.8	95.2
70	0.212	14.8	19.6	80.4
100	0.150	41.0	60.6	39.4
140	0.106	30.0	90.6	9.4
200	0.075	8.4	98.7	1.3
270	0.053	0.9	99.6	0.4
Pan		0.1	100.0	0.0

### TYPICAL PHYSICAL PROPERTIES

GRAIN SHAPE ..... ROUND  
 HARDNESS (Mohs) ..... 7  
 MELTING POINT (Degrees F) ..... 3100

MINERAL ..... QUARTZ  
 pH ..... 6.8  
 SPECIFIC GRAVITY ..... 2.65

### TYPICAL CHEMICAL ANALYSIS, %

SiO<sub>2</sub> (Silicon Dioxide) ..... 99.8  
 Fe<sub>2</sub>O<sub>3</sub> (Iron Oxide) ..... 0.017  
 Al<sub>2</sub>O<sub>3</sub> (Aluminum Oxide) ..... 0.09  
 TiO<sub>2</sub> (Titanium Dioxide) ..... <0.01  
 CaO (Calcium Oxide) ..... <0.01

MgO (Magnesium Oxide) ..... <0.01  
 Na<sub>2</sub>O (Sodium Oxide) ..... <0.01  
 K<sub>2</sub>O (Potassium Oxide) ..... 0.04  
 LOI (Loss On Ignition) ..... 0.1

July 1, 2008

**DISCLAIMER:** The information set forth in this Product Data Sheet represents typical properties of the product described; the information and the typical values are not specifications. U.S. Silica Company makes no representation or warranty concerning the Products, expressed or implied, by this Product Data Sheet.

**WARNING:** The product contains crystalline silica - quartz, which can cause silicosis (an occupational lung disease) and lung cancer. For detailed information on the potential health effect of crystalline silica - quartz, see the U.S. Silica Company Material Safety Data Sheet.